




IES FILE

PHOTOMETRIC REPORT

Polar Plot

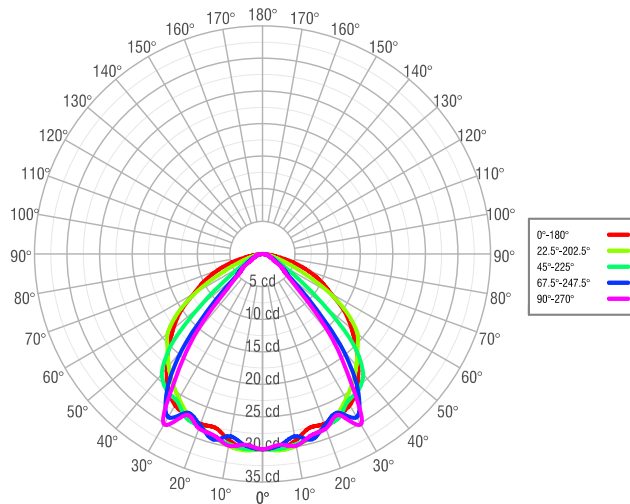

Cone of Light

Mtg Height	Light Level	Beam Diameter
6 ft	1 fc	14 ft
8 ft	0 fc	18 ft
10 ft	0 fc	23 ft
12 ft	0 fc	28 ft
15 ft	0 fc	35 ft

Input:

Number of Lamps:	10
Lumens per Lamp:	8.45 lm
Input Watts:	1.1 W

Output:

Efficiency:	78%
-------------	-----

Catalog Number

PJ3K-24V+CH-607+CLEAR - 1ft

Test Number

1

Test Date

Tue Aug 22 11:51:00 2017

Candela Distribution

	0°	22.50°	45°	67.50°	90°
0°	29.98	29.98	29.98	29.98	29.98
5°	30.1	30.26	30.03	29.53	29.42
10°	29.08	29.92	29.63	28.43	29.88
15°	27.67	29.05	29.13	29.46	28.83
20°	27.77	28.12	28.25	27.97	28.51
25°	27.36	27.14	27.73	26.92	27.28
30°	26.81	25.64	26.15	28.92	30.2
35°	25.25	24.1	25.6	25.61	23.21
40°	22.87	22.4	24.06	19.29	16.01
45°	20.33	20.62	19.93	10.62	7.75
50°	17.88	19.04	12.52	5.16	4.57
55°	15.36	15.94	6.7	3.9	3.6
60°	12.1	11.76	3.63	2.41	2
65°	9.84	6.91	2.13	1.68	1.63
70°	7.32	3.77	1.28	1.09	1.16
75°	4.74	1.47	0.8	0.92	0.98
80°	1.94	0.49	0.51	0.45	0.36
85°	0.33	0.15	0.13	0.1	0.09
90°	0.02	0.02	0.03	0.02	0.01