




JAGGER™ (INDOOR)

JA-SERIES | CORNER BENDING | LINEAR LED LIGHTING

Fixture Type: _____

Project: _____

Location: _____

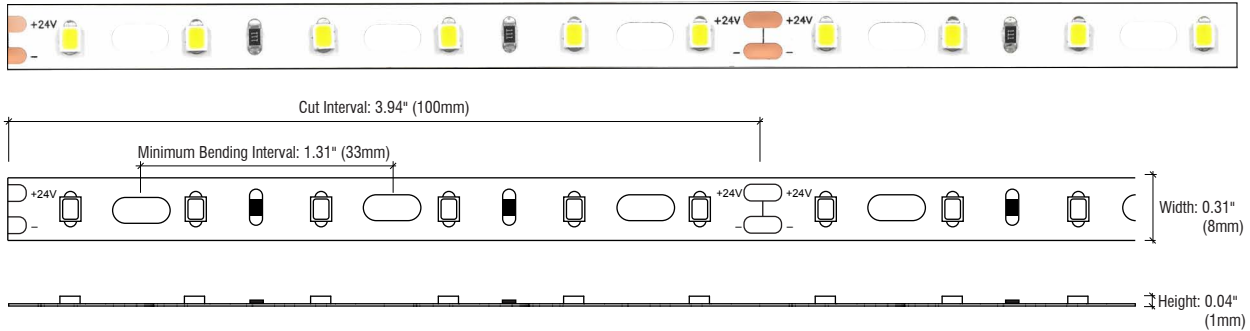


MODEL:	JA27K-24V	JA30K-24V	JA35K-24V	JA40K-24V	JA50K-24V	JA65K-24V
Kelvin	2700K	3000K	3500K	4000K	5000K	6500K
Lumens	155 lm/ft	159 lm/ft	163 lm/ft	167 lm/ft	171 lm/ft	173 lm/ft

PRODUCT FEATURES

- Ideal for Curved Lighting Applications
- Dimmable
- 50,000 Hour Life
- 5-Year Warranty
- UL-Listed for Indoor Use
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies

SPECIFICATIONS

Series	JA - Jagger™ (Indoor)
Input Voltage	24V DC / Constant Voltage
Watts per Foot	2.2W/ft @ Maximum Run Length
Beam Spread	120°
Max Run Length	Unlimited, power every 16ft
Production Intervals	3.94" (100mm)
Dimensions	0.31" (8mm) x 0.04" (1mm)
CRI	90+
Diode	2835
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 113°F (45°C)

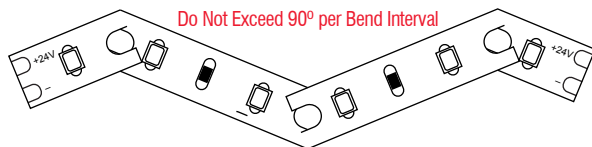

TOTAL WATTAGE USED AT EACH LENGTH

1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft	9ft	10ft	11ft	12ft	13ft	14ft	15ft	16ft
2.2	3.6	6.6	8.8	11	13.2	15.4	17.6	19.8	22	24.2	26.4	28.6	30.8	33	35.2

Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.0

