


FIXTURE TYPE _____

PROJECT NAME _____

LOCATION _____

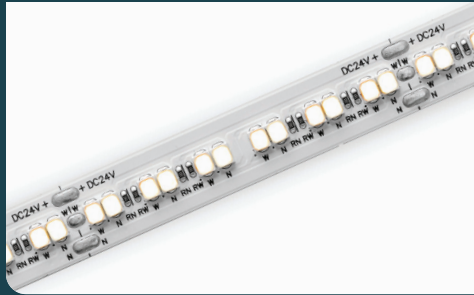

Uniform Color Tuning (Indoor)

COLOR TUNING INDOOR TAPE



I Description

Our Uniform series provides single bin color consistency across every single output option. Uniform Color Tuning allows you to dial in an exact CCT from 1800K-3500K.

I Features

- Uses U2835 Diode
- Create a Custom Fixture with Kelvix Channels
- 5-Year Warranty
- UL-Listed
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies
- Dimmable using Kelvix Power Supplies
- Offered 3-step SDCM

I Series Spec

Series	UNIX-CT
Temp/Colors*	1800K-3500K
Input Voltage	24V DC/Constant Voltage
Beam Spread	120°
CRI	Ra 90+
SDCM	3-Step
Diode	2835
Diode Pitch	216 LED/m
Cut Intervals	2.19" (55.6mm)
Dimensions	0.47" (12.0mm) × 0.07" (1.8mm)
Operating Temp.	-4°F (-20°C) to 140°F (60°C)
Storage Temp.	-4°F (-20°C) to 158°F (70°C)

I Product Code Builder

Series	Location	Output*	Temp/Color*	Voltage	Modification
UNI3-CT	I		1835K	24V	NA
UNI3-CT – Uniform Color Tuning 3-Step	I – Indoor	300 –300 lm/ft 600 –600 lm/ft	1835K – 1800K-3500K	24V – 24V DC	NA – None

Example: UNI3-CT-I-300-1835K-24V-NA

* Customizable—Consult Factory

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 NO. 250.0




I Series Data

Output (lm/ft)	UNI3-CT 300	UNI3-CT 600
Lumens (per ft)	328	657
Wattage ¹ (per ft)	2.8	5.8
Efficiency (lm/W)	107	106
Max Run Length (ft)	35	19

¹Power consumption based on average wattage per foot. Refer to Power Chart on page 3 for details.

I Dimensions

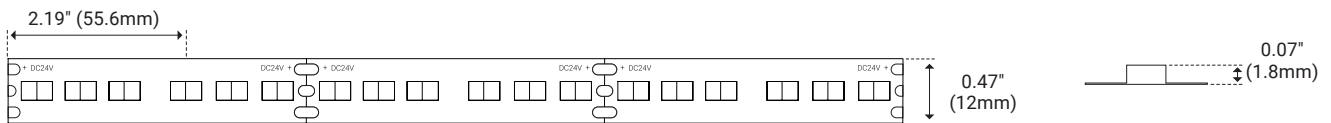


I Power Feed Accessories*

Lead




Unit Number	Length
FML-3C-1	12.00" (305.0mm)
FML-3C-2	24.00" (0.60m)
FML-3C-3	36.00" (0.91m)
FML-3C-6	72.00" (1.82m)
FML-3C-12	144.00" (3.65m)
FML-3C-15	180.00" (4.57m)
FML-3C-20	240.00" (6.09m)

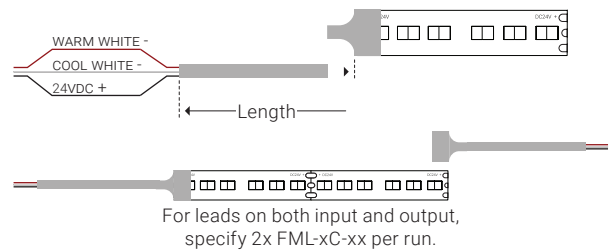

Connector



Unit Number	Length
FMC-3C-1.5I	1.50" (38.0mm)
FMC-3C-3I	3.00" (76.0mm)
FMC-3C-6I	6.00" (152.0mm)
FMC-3C-9I	9.00" (228.0mm)
FMC-3C-1	12.00" (305.0mm)
FMC-3C-2	24.00" (0.60m)

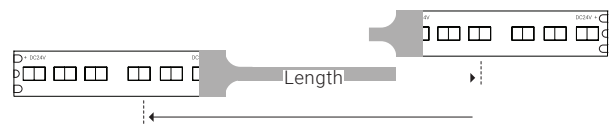




I Power Chart

		UNI3-CT-300	UNI3-CT-600
Watts	1 ft	3.3	6.7
	2 ft	6.6	13.2
	3 ft	9.8	19.4
	4 ft	12.9	25.5
	5 ft	16	31.4
	6 ft	19.1	37.1
	7 ft	22.1	42.5
	8 ft	25	47.8
	9 ft	27.9	52.9
	10 ft	30.7	57.7
	11 ft	33.5	62.4
	12 ft	36.2	66.8
	13 ft	38.8	71.1
	14 ft	41.4	75.1
	15 ft	43.9	79
	16 ft	46.4	82.6
	17 ft	48.8	86
	18 ft	51.2	89.3
	19 ft	53.5	92.3
	20 ft	55.8	-
	21 ft	58	-
	22 ft	60.1	-
	23 ft	62.2	-
	24 ft	64.3	-
	25 ft	66.2	-
	26 ft	68.2	-
	27 ft	70	-
	28 ft	71.8	-
	29 ft	73.6	-
	30 ft	75.3	-
	31 ft	77	-
	32 ft	78.5	-
	33 ft	80.1	-
	34 ft	81.5	-
	35 ft	83	-




I Colorimetric Details (3000K)

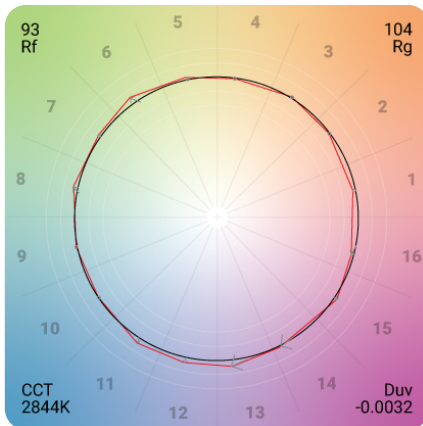

I Photometric Details (3000K)


UNI3-WH 300 18K

Mtg Height	Light Level	Beam Diameter
1.00 ft	42.75 fc	3.01 ft
2.00 ft	10.69 fc	6.02 ft
3.00 ft	4.75 fc	9.03 ft
4.00 ft	2.67 fc	12.04 ft
5.00 ft	1.71 fc	15.05 ft
6.00 ft	1.19 fc	18.06 ft
8.00 ft	0.67 fc	24.08 ft
10.00 ft	0.43 fc	30.10 ft
12.00 ft	0.30 fc	36.12 ft
15.00 ft	0.19 fc	45.15 ft

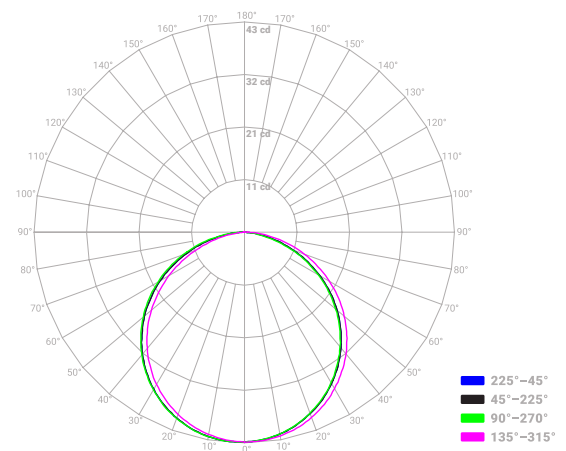

UNI3-WH 300 35K

Mtg Height	Light Level	Beam Diameter
1.00 ft	71.92 fc	3.06 ft
2.00 ft	17.98 fc	6.13 ft
3.00 ft	7.99 fc	9.19 ft
4.00 ft	4.49 fc	12.26 ft
5.00 ft	2.88 fc	15.32 ft
6.00 ft	2.00 fc	18.39 ft
8.00 ft	1.12 fc	24.51 ft
10.00 ft	0.72 fc	30.64 ft
12.00 ft	0.50 fc	36.77 ft
15.00 ft	0.32 fc	45.96 ft

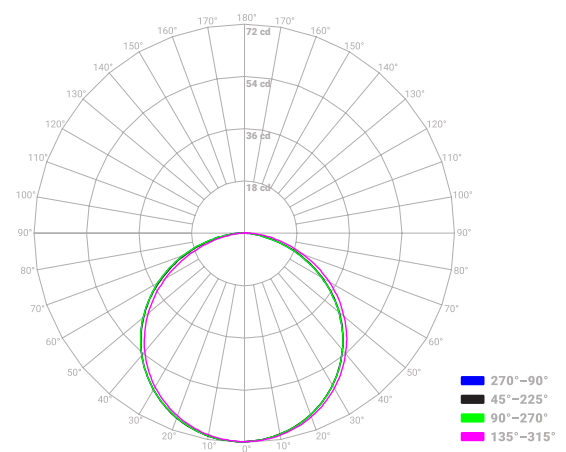




I Photometric Details (3000K)


UNI3-WH 300 Full

Mtg Height	Light Level	Beam Diameter
1.00 ft	113.23 fc	3.04 ft
2.00 ft	28.31 fc	6.09 ft
3.00 ft	12.58 fc	9.13 ft
4.00 ft	7.08 fc	12.18 ft
5.00 ft	4.53 fc	15.22 ft
6.00 ft	3.15 fc	18.26 ft
8.00 ft	1.77 fc	24.35 ft
10.00 ft	1.13 fc	30.44 ft
12.00 ft	0.79 fc	36.53 ft
15.00 ft	0.50 fc	45.66 ft

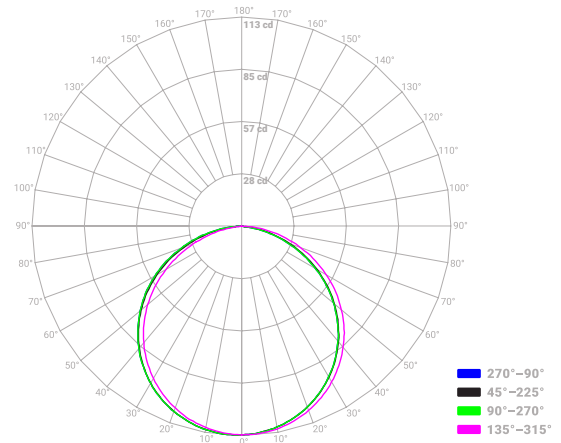


UNI3-WH 600 18K

Mtg Height	Light Level	Beam Diameter
1.00 ft	86.03 fc	3.00 ft
2.00 ft	21.51 fc	6.00 ft
3.00 ft	9.56 fc	9.00 ft
4.00 ft	5.38 fc	12.00 ft
5.00 ft	3.44 fc	15.01 ft
6.00 ft	2.39 fc	18.01 ft
8.00 ft	1.34 fc	24.01 ft
10.00 ft	0.86 fc	30.01 ft
12.00 ft	0.60 fc	36.01 ft
15.00 ft	0.38 fc	45.02 ft

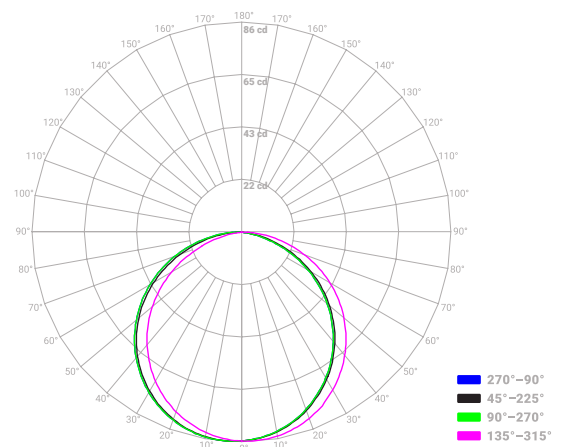

UNI3-WH 600 35K

Mtg Height	Light Level	Beam Diameter
1.00 ft	145.98 fc	3.06 ft
2.00 ft	36.49 fc	6.13 ft
3.00 ft	16.22 fc	9.19 ft
4.00 ft	9.12 fc	12.26 ft
5.00 ft	5.84 fc	15.32 ft
6.00 ft	4.05 fc	18.39 ft
8.00 ft	2.28 fc	24.51 ft
10.00 ft	1.46 fc	30.64 ft
12.00 ft	1.01 fc	36.77 ft
15.00 ft	0.65 fc	45.96 ft

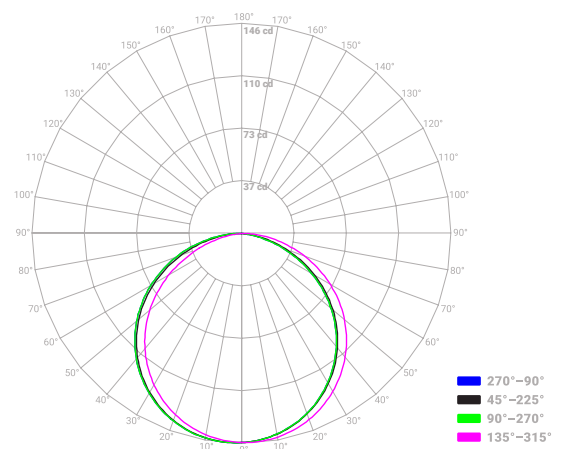



I Photometric Details (3000K)

UNI3-WH 600 Full

Mtg Height	Light Level	Beam Diameter
1.00 ft	224.15 fc	3.03 ft
2.00 ft	56.04 fc	6.06 ft
3.00 ft	24.91 fc	9.09 ft
4.00 ft	14.01 fc	12.12 ft
5.00 ft	8.97 fc	15.15 ft
6.00 ft	6.23 fc	18.18 ft
8.00 ft	3.50 fc	24.24 ft
10.00 ft	2.24 fc	30.29 ft
12.00 ft	1.56 fc	36.35 ft
15.00 ft	1.00 fc	45.44 ft

