



# Complete Specification Sheet

## Jagger™ Static Color

LINEAR  
LED



# Jagger™ Static Color (Indoor)

Corner Bending Linear LED



### Specifications

Category	Linear LED
Series	Jagger
Family	Static Color
Environment	IP67
CRI	90+
CCT Options	2400K, 2700K, 3000K, 3500K, 4000K, 5000K
Input Voltage	24V DC
Width	0.31in (8.0mm)
Height	0.04in (1.0mm)
Max Run Length	16ft (4.87M)
Cut Intervals	3.94" (100.0mm)
Operating Temp.	-40°F (-40°C) to 113°F (45°C)
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume


### Features

- Ideal for Curved Lighting Applications
- Dimmable
- 50,000 Hour Life
- 5-Year Warranty
- UL-Listed for Indoor Use
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies

### Description

Jagger can bend into nearly any shape. Since it can flex both horizontally and vertically, Jagger is perfect for backlighting shapes and letters used for signage.

### Dimensions

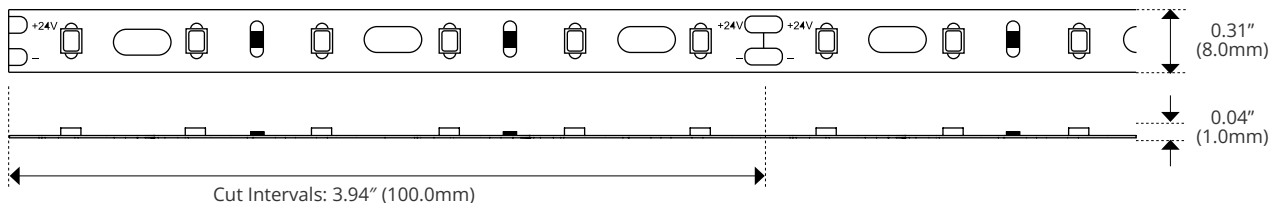

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.  
 Conforms to ANSI/UL Standard 2108  
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type \_\_\_\_\_

Project Name \_\_\_\_\_

Location \_\_\_\_\_




# Product Code Builder

## Jagger™ Static Color

### Product Code Builder

Example: JA27K-24V

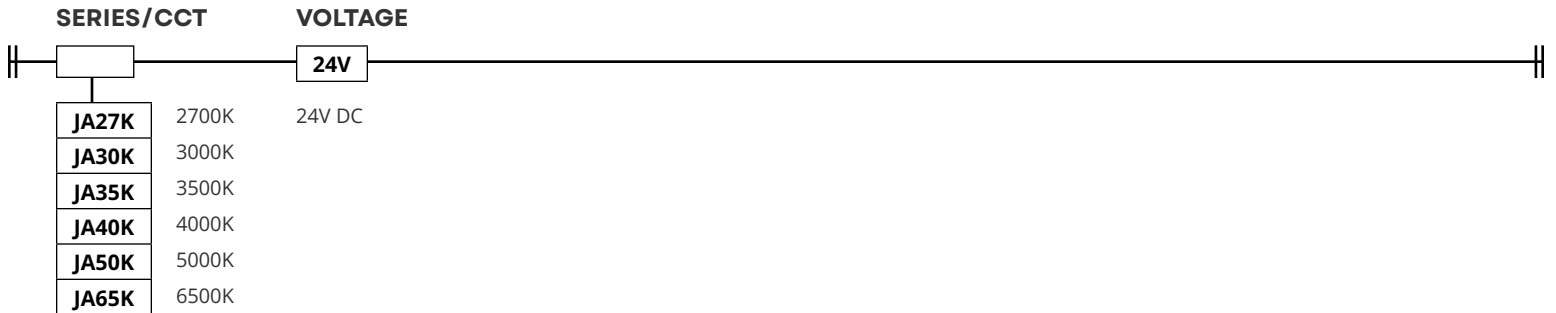


### PRODUCT DATA

Feet	Watts
1	2.2
2	3.6
3	6.6
4	8.8
5	11
6	13.2
7	15.4
8	17.6
9	19.8
10	22
11	24.2
12	26.4
13	28.6
14	30.8
15	33
16	35.2

CCT	lm/ft
2700K	155
3000K	159
3500K	163
4000K	167
5000K	171
6500K	173

### BEND DIAMETER

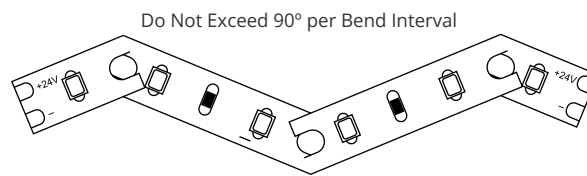

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.  
 Conforms to ANSI/UL Standard 2108  
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type \_\_\_\_\_

Project Name \_\_\_\_\_

Location \_\_\_\_\_