



# Complete Specification Sheet

## Pavex™ Round

LINEAR  
LED

## Pavex™ Round

Inground Hardscape Fixture



### Specifications

Category	Linear LED
Series	Pavex
Family	Round
Lumens per Watt	30 lm/w
Environment	IP67
CCT Options	2700K, 3000K, 3500K, 4000K, Red, Blue, Green
Input Voltage	24V DC
Lengths (Diameter)	3", 6", or 12"
Width	3.39in (86.0mm)
Impact Rating	IK10
Drive-Over Rating	10,000 lbs
Operating Temp.	-13°F (-25°C) to 122°F (50°C)


### Features

- Perfect for Pavers, Gravel, Soil, Decks, Etc (Custom Housing needed for Concrete Mounting)
- Pure White Tempered Glass
- Drive-Over Rated
- Non-Slip Textured Surface
- High Impact Rated / IK10
- Custom Sizes Available

### Description

Pavex Round is a unique, drive-over rated in-ground hardscape fixture. With multiple colors and CCT's, Pavex's non-slip high impact glass looks amazing in a variety of layout configurations. NOTE: Pavex Lighting Source and Housing Sold Separately.

### Dimensions

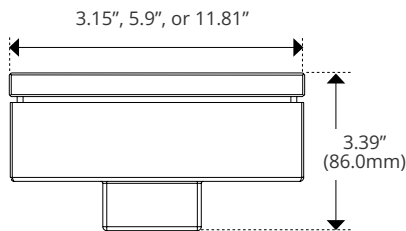

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.  
 Conforms to ANSI/UL Standard 2108  
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type \_\_\_\_\_

Project Name \_\_\_\_\_

Location \_\_\_\_\_




# Product Code Builder

## Pavex™ Round

### Product Code Builder

Example: PVX-L-12X2-27-ST-L-SS-24V

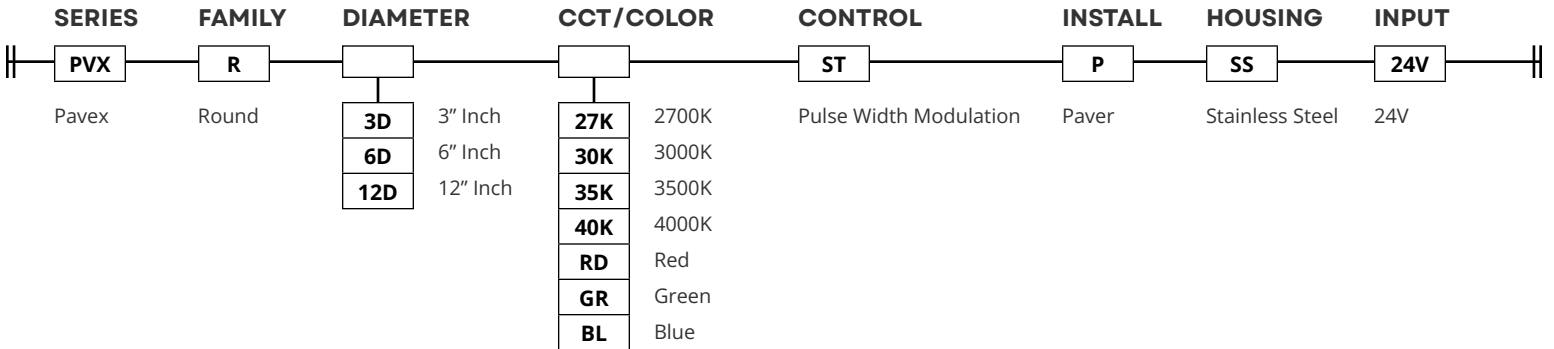

### PRODUCT DATA

Feet	Watts	Lumens
3D	1.3W	39 lm
6D	1.3W	39 lm
12D	6W	180 lm

### DIMENSIONS

	Diameter	Height
3D	3.15in (80.0mm)	3.39in (86.0mm)
6D	5.90in (150.0mm)	3.39in (86.0mm)
12D	11.81in (300.0mm)	3.39in (86.0mm)

\*Consult Kelvix for custom lengths

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.

Conforms to ANSI/UL Standard 2108

Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type \_\_\_\_\_

Project Name \_\_\_\_\_

Location \_\_\_\_\_




# Housing Options

## Pavex™ Round Housing

### Product Code Builder

Example: PVX-L-12X2-S-K1-SS

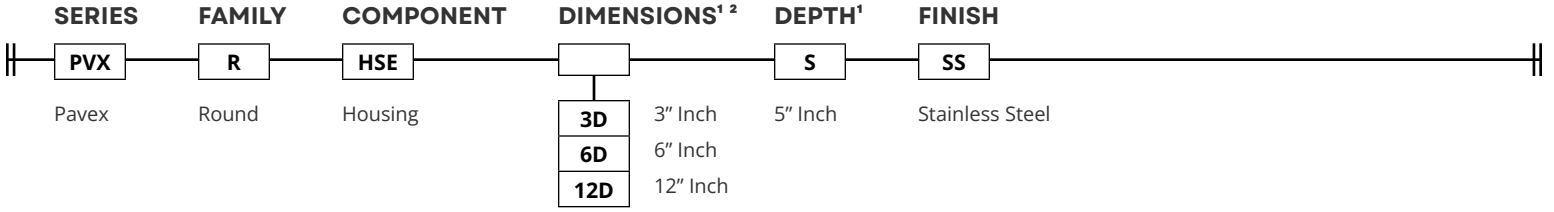

### IMAGE


Housing



### DIMENSIONS

	Diameter	Width
3D	3.35in (85.0mm)	5.00in (127.0mm)
6D	6.10in (155.0mm)	5.00in (127.0mm)
12D	12.00in (305.0mm)	5.00in (127.0mm)

3.35", 6.10", or 12.0"

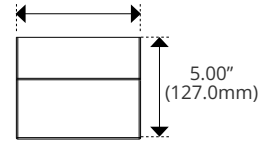

<sup>1</sup>Consult Kelvix for custom lengths

<sup>2</sup>Housing dimensions will match Fixture dimensions. Options shown here for ease

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.

Conforms to ANSI/UL Standard 2108

Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type \_\_\_\_\_

Project Name \_\_\_\_\_

Location \_\_\_\_\_