



Z3—ZOLO™ 3

ULTRA-THIN INDOOR LED WASHER/GRAZER


Fixture Type: _____

Project: _____

Location: _____


PRODUCT FEATURES

- Multiple Optics Options Available
- Extruded Aluminum Alloy Housing
- Available in Titanium Gray, Black or White Finish
- Multi Volt 24VDC Remote Driver (Sold Separately)
- Daisy Chain Multiple Fixtures
- Optional Solid Glare Shield

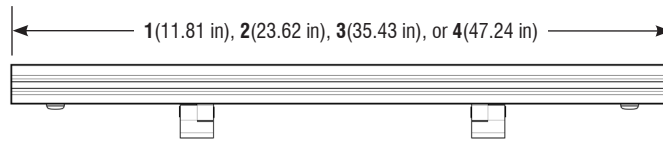

SPECIFICATIONS

Input Voltage	24VDC / Constant Voltage
Watts per Foot	6W (Custom Wattages Available—Consult Factory)
Lumen per Watt	100 lm/W
Lumen per Foot	600 lm/ft
Beam Spread	15° × 30°, 15°, 30°, 60°, 80°
Max Run Length	Up to 96W per Power Feed
Dimensions	1" (26mm) × 0.8" (21mm) × Variable (see below)
CRI	85 (Custom CRI Available—Consult Factory)
Dimming Options	PWM, Triac, 0–10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 140°F (60°C)

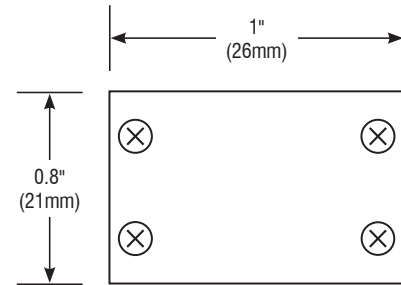

ORDERING INFORMATION

Example: Z3-1-6W-30K-1530-S1-TG-GS

Item	Length	Output	CCT	Beam Angle	Mounting	Finish	Option
Z3		6W					
Z3—Zolo-3	1—11.81" (300mm) 2—23.62" (600mm) 3—35.43" (900mm) 4—47.24" (1200mm)	6W—6W/ft <i>*Custom Wattages Available</i>	27K—2700K 30K—3000K 35K—3500K 40K—4000K <i>*Custom CCT Available</i>	1530—15° × 30° 15—15° 30—30° 60—60° 80—80°	S1—1" Mounting Clip CP—Mounting Clip	TG—Titanium Gray BK—Black WH—White	NA—None GS—Solid Glare Shield LV—Louver ALV—Asymmetric Louver

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.0





Z3—ZOLO™ 3 OPTIONS

FOR USE WITH ZOLO 3


Fixture Type: _____

Project: _____

Location: _____

MOUNTING OPTIONS


1" STAND OFF



SPECIFICATIONS

Option	Z-03-S1
Overall Width	1.3"
Overall Height	1.0"

MOUNTING CLIP


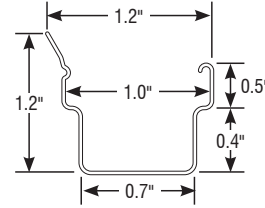


SPECIFICATIONS

Option	Z-03-CP
Overall Width	1.2"
Overall Height	1.2"

GLARE OPTIONS



ZOLO 3 STANDARD

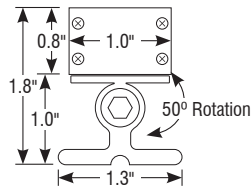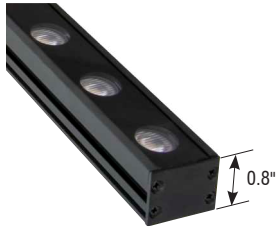

SPECIFICATIONS

Option	NA
Overall Height	0.8"


ZOLO 3 W/ SOLID GLARE SHIELD

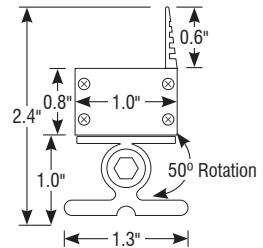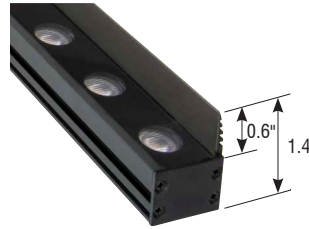

SPECIFICATIONS

Option	Z-03-GS
Overall Height	1.4"


LOUVER

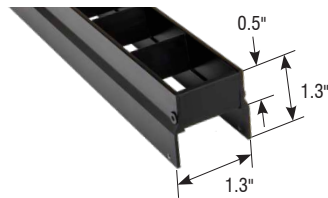

SPECIFICATIONS

Option	Z-03-LV	Overall Height	1.3"
Louver Height	0.5"	Louver Width	1.3"

ASYMMETRIC LOUVER

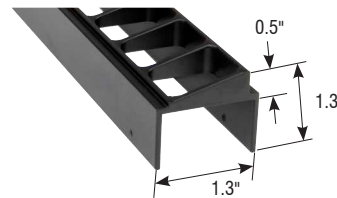

SPECIFICATIONS

Option	Z-03-ALV	Overall Height	1.3"
Louver Height	0.5"	Louver Width	1.3"



Z3—ZOLO™ 3 OPTIONS

FOR USE WITH ZOLO 3

Fixture Type: _____

Project: _____

Location: _____

POWER LEAD **REQUIRED ITEM!**

Connects a Zolo or group of Zolo fixtures to the power supply. Please specify length.




POWER LEAD CABLE

Connects Factory Installed Lead to Power Supply

SPECIFICATIONS


Option Z-03-FML-6	Option Z-03-FML-20	Option Z-03-FML-50
Length 6ft	Length 20ft	Length 50ft

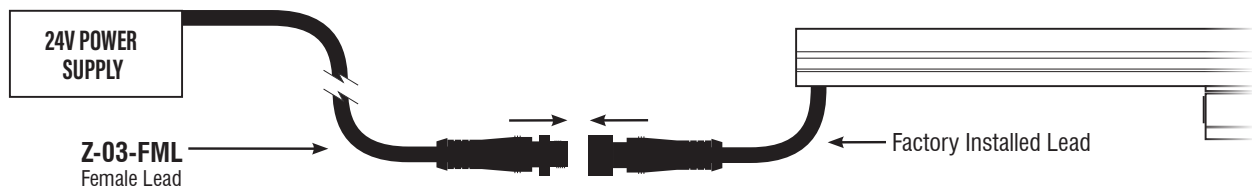

CONNECTOR

ZOLO INTERCONNECT CABLES

Daisy Chains Multiple Fixtures

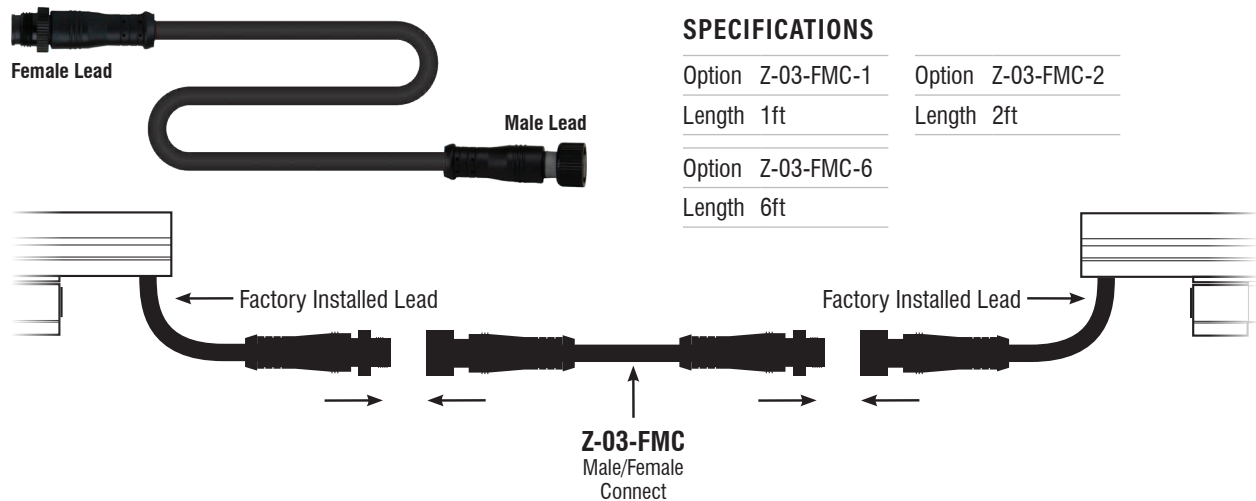

SPECIFICATIONS

Option Z-03-FMC-1	Option Z-03-FMC-2
Length 1ft	Length 2ft
Option Z-03-FMC-6	
Length 6ft	



Z3—ZOLO™ 3 WIRING OPTIONS


ULTRA-THIN INDOOR LED WASHER/GRAZER

Fixture Type: _____


Project: _____

Location: _____

PRIMARY SIDE DIMMING (120V ONLY)

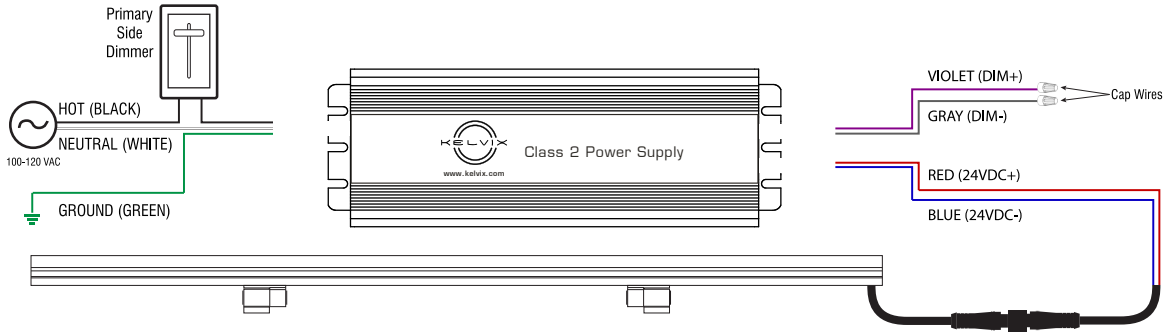

PRIMARY SIDE SWITCHING (120-277V)

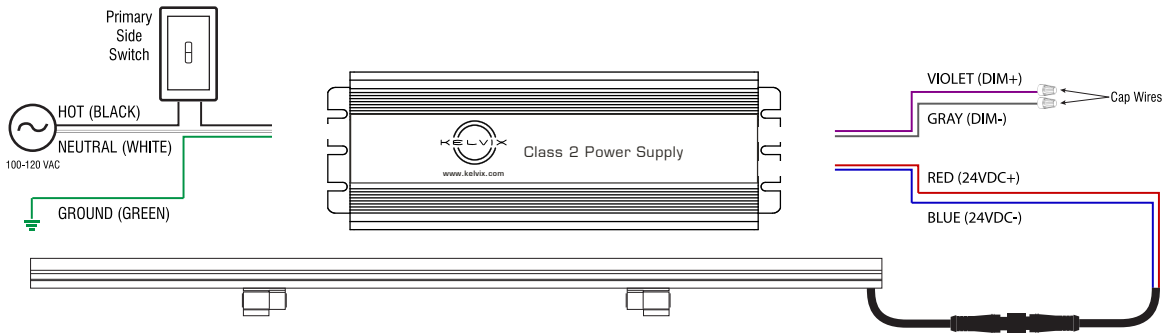

0-10V DIMMING (120-277V)

